



SIRIUS is different by design. With more included features, more innovation, and more value, it's not hard to see what makes SIRIUS first in class.

FEATURE

Aluminum roof supports

BENEFIT

Maximum strength with the best corrosion resistance

FEATURE

Strong AC motor paired with eight 6V batteries for extended range

BENEFIT

The prescription to end Range Anxiety Disorder

FEATURE

QDS™ Drive System

BENEFIT

Conquer hills faster & quieter





FEATURE

Auto-style full color display

BENEFIT

Delivers easy-to-read critical status and operational information

FEATURE

Optimized storage including locking front trunk and glove box

BENEFIT

Convenience and organization

FEATURE

Custom designed street LED

BENEFIT

Boost visibility

FEATURE

Race-inspired chassis and double wishbone independent suspension

BENEFIT

Superior ride performance



Secure your items

Keep personal items secure with a locking trunk that doubles as a drain-able cooler. Spend more time enjoying the ride with comfort and convenience.



Enjoy a beverage

Enjoy a beverage without worrying about spills with accessible and sturdy drink holders.



Safety is measured \spadesuit

Enjoy the safety and luxury of self-canceling turn signals and ambient interior lighting.



Ergonomic control 😯



Enjoy your experience with the seamless functionality and display of the automotive like controls.



Great illumination > 0 = Equipped with day time running lights.



High level suspension and chassis For both on or off road capabilities enjoy the durability of the racing inspired suspension and chassis.



Speed Controls (?)

Choose your desired speed with forward, reverse, slow and fast speed controls.



Secure valuables
Keep your valuables safe with this secured lock and key dash.









	SIRIUS 2	SIRIUS 2+2	SIRIUS 2+2 LIFTED	
DIMENSIONS				
Overall	93" L x 47" W x 75" H	117" L x 47" W x 78" H	119" L x 51" W x 79.5" H	
Wheel base	66" (168 cm)	66" (168 cm)	66" (168 cm)	
Ground clearance	5.75" (14.6 cm)	5.75" (14.6 cm)	6.875" (17.46 cm)	
Wheel type	12" x 7" - 15mm Aluminum	12" x 7" - 15mm Aluminum	12" x 7" -43 mm Aluminum	
Tire size	20 x 9.0-12 DOT	20 x 9.0-12 DOT	23 x 10, 5-12 DOT	
Tire pressure	40 psi (280 kPa)	40 psi (280 kPa)	20 psi (138 kPa)	
BODY & CHASSIS				
Chassis	Welded tubular steel	Welded tubular steel	Welded tubular steel	
Body material	Plastic with Automotive paint	Plastic with Automotive paint	Plastic with Automotive paint	
Roof material	Plastic, injection molded	Plastic, injection molded	Plastic, injection molded	
Side rails	Aluminum	Aluminum	Aluminum	
POWER				
Battery system	8 x 6 V, Trojan T-105	8 x 6 V, Trojan T-105	8 x 6 V, Trojan T-105	
Motor power	4 kW AC with thermal protection	4 kW AC with thermal protection	4 kW AC with thermal protection	
Controller power	48 V, 350 A Curtis	48 V, 350 A Curtis	48 V, 350 A Curtis	
PERFORMANCE				
Passengers	2	4	4	
Top speed	19.5 mph - 25 mph if LSV	19.5 mph - 25 mph if LSV	19.5 mph - 25 mph if LSV	
Turning radius	10.5 ft (3.2 m)	10.5 ft (3.2 m)	10.5 ft (3.2 m)	
Load capacity	800 lbs (363 kg)	800 lbs (363 kg)	800 lbs (363 kg)	
Weight with batteries	1255 lbs (569 kg)	1402 lbs (636 kg)	1450 lbs (658 kg)	
Brake system	Rear Drum	Rear Drum	Rear Drum	
Drive train	Direct rear drive with 12.4:1 ratio	Direct rear drive with 12.4:1 ratio	Direct rear drive with 12.4:1 ratio	
STEERING AND SUSPEN	ISION			
Steering system	3 spoke aluminum with self-cancelling	3 spoke aluminum with self-cancelling	3 spoke aluminum with self-cancelling	
Steering Pack	Self compensated rack and pinion	Self compensated rack and pinion	Self compensated rack and pinion	
Front suspension	Adjustable coil over shock, independent	Adjustable coil over shock, independent	Adjustable coil over shock, independent	
Rear suspension	Adjustable coil over shock	Adjustable coil over shock	Adjustable coil over shock	

	SIRIUS 4	SIRIUS 4+2	SIRIUS 4+2 LIFTED
DIMENSIONS			
Overall	123" L x 47" W x 77" H	140" L x 47" W x 79" H	142" L x 51" W x 80.5" H
Wheel base	96" (244 cm)	96" (244 cm)	96" (244 cm)
Ground clearance	5.75" (14.6 cm)	5.75" (14.6 cm)	6.875" (17.46 cm)
Wheel type	12" x 7" - 15 mm Aluminum	12" x 7" - 15 mm Aluminum	12" x 7" - 43 mm Aluminum
Tire size	20 x 9.0-12 DOT	20 x 9.0-12 DOT	23 x 10.5 - 12 DOT
Tire pressure	40 psi (280 kPa)	40 psi (280 kPa)	20 psi (138 kPa)
BODY & CHASSIS		I was a second	
Chassis	Welded tubular steel	Welded tubular steel	Welded tubular steel
Body material	Plastic with Automotive paint	Plastic with Automotive paint	Plastic with Automotive paint
Roof material	Plastic, extended, color matched	Plastic, extended, color matched	Plastic, extended, color matched
Side rails	Aluminum	Aluminum	Aluminum
POWER		I	
Battery system	8 x 6 V, Trojan T-105	8 x 6 V, Trojan T-105	8 x 6 V, Trojan T-105
Motor power	5 kW AC with thermal protection	5 kW AC with thermal protection	5 kW AC with thermal protection
Controller power	48 V, 450 A Curtis	48 V, 450 A Curtis	48 V, 450 A Curtis
PERFORMANCE			
Passengers	4	6	6
Top speed	19.5 mph - 25 mph if LSV	19.5 mph - 25 mph if LSV	19.5 mph - 25 mph if LSV
Turning radius	15 ft (4.6 m)	15 ft (4.6 m)	15 ft (4.6 m)
Load capacity	1000 lbs (454 kg)	1000 lbs (454 kg)	1000 lbs (454 kg)
Weight with batteries	1430 lbs (650 kg)	1550 lbs (703 kg)	1600 lbs (726 kg)
Brake system	4 wheel hydraulic, front disk, rear drum, foot activated multi click parking brake	4 wheel hydraulic, front disk, rear drum, foot activated multi click parking brake	4 wheel hydraulic, front disk, rear drum, foot activated multi click parking brake
Drive train	Direct rear drive with 12.4:1 ratio	Direct rear drive with 12.4:1 ratio	Direct rear drive with 12.4:1 ratio
STEERING AND SUSPE	NSION		
Steering system	3 spoke aluminum with self-canceling	3 spoke aluminum with self-canceling	3 spoke aluminum with self-canceling
Steering Pack	Self compensated rack and pinion	Self compensated rack and pinion	Self compensated rack and pinion
Front suspension	Adjustable coil over shock, independent	Adjustable coil over shock, independent	Adjustable coil over shock, independent
Rear suspension	Adjustable coil over shock, trailing arm	Adjustable coil over shock, trailing arm	Adjustable coil over shock, trailing arm


STANDARD COLORS



FEATURES AND UPGRADES

VEHICLE STANDARD FEATURES					
Four year limited warranty, two year bumper-to-bumper warranty (less wear items) •	LED headlights with high beams, taillights, brake lights, self-canceling turn signals, daytime running lights, reverse light.	Detailed full-color display: speedometer, odometer, and battery indicator (back-up camera ready)			
Rear view mirrors with turn signal indicators on both sides	Electronic locking front trunk	Eight 6 V (48 V) batteries			
QDS™ Drive System	USB 12 V standard accessory outlet	Adjustable seat backs			
Curtis AC controller with custom programming	Console with ambient dash lighting	Lockable glove box door			
Horn and reverse beeper	Folding tinted windshield	High/Low speed switch			
OPTIONAL EQUIPMENT					
Sirius Unique Key	Wiper (one piece glass windshield required)	Sirius one piece windshield			
Illuminated license plate holder	Industrial LED strobe light	Rear LED brake light bar			
LSV (NEV) street legal package	Back-up camera	2-in-1 combo seat			
14" tires and rims	Premium seats	Custom paint			
Mud Flaps	Enclosures	Club protector			
* See printed warranty in the SIRIUS® Owner's Manual for details.					



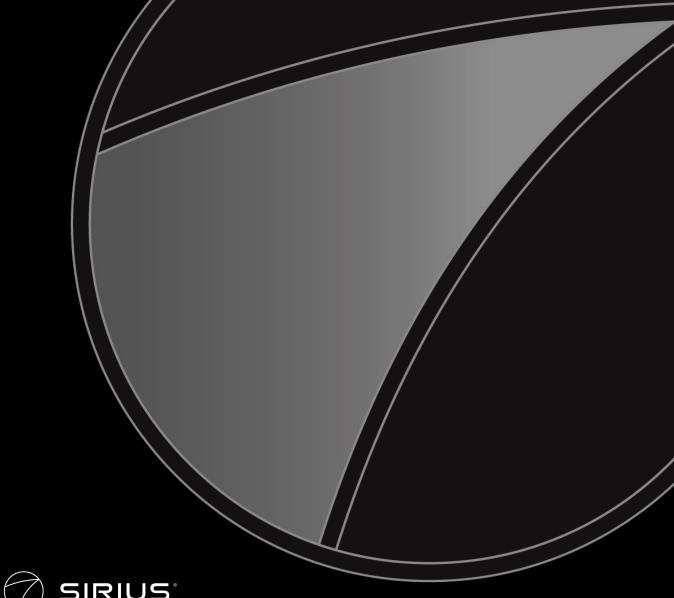





STAR Electric Vehicles® a brand of JH Global Services, Inc.

378 Neely Ferry Road Simpsonville, SC 29680, USA Phone: (864) 297-8833 Toll Free: (888) 878-9988 www.starev.com